
HAIKU WITH UV-C TECHNOLOGY

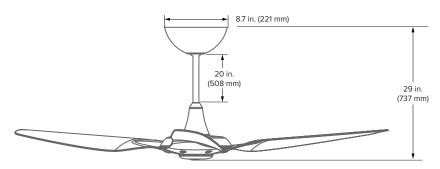

Shown with the 20 in. (508 mm) downrod. See the full fan cut sheet for a complete list of fan heights with optional downrods.

Technical Specifications								
Operating Voltage	Operating Current	Input Power	Peak Wavelength	Maintenance ¹	Operating Temperature			
12–24 VDC	0.9 A–1.9 A	21.2–22.4 W	260–270 nm	Replace diodes annually (recommended)	32° to 104 °F (0° to 40 °C)			

Construction and Controls								
Premium Components Finish		Controls	Environment	Certifications				
265 nm UV-C diodes Custom aluminum heatsink	Matches fan motor finish	On/Off Remote control Clean Mode with the Haiku mobile app	Indoor use only	UL 1598 CSA C22.2 No. 250				

Ordering I	nformation						UV-C Light
Diameter	Mount	Airfoil Material, Motor Finish	Country	Motor	Gen	Airfoil Finish (Aluminum Only)	Finish Options
52 inch: S3127 60 inch: S3150 84 inch: B3213	52 inch: X2 60 inch: X2 84 inch: X4	Aluminum, Black: AB Aluminum, ORB: AO Aluminum, ORB: AO Aluminum, White: AW Bamboo Caramel, Black: BC Bamboo Caramel, ORB: BCO Bamboo Caramel, ONHIC: BCW Bamboo Cocoa, Black: BW Bamboo Cocoa, ORB: BWO Bamboo Cocoa, Mhite: BWS	North America: 0402	52 in: C 60 in: C 84 in: D	01	Black: F258-G9 White: F259-G9 Brushed Copper: F523-G9 Brushed Aluminum: F531-G9 Satin Nickel: F470-G9 Oil-Rubbed Bronze: F471-G9 Driftwood: F772-G9 Chrome: F779-G9	Black: 009785-258 White: 009785-259 Satin Nickel: 009785-470 Oil-Rubbed Bronze: 009785-471



¹ Big Ass Fans recommends replacing the UV-C LED board annually. To preserve UV-C capabilities, the LEDs are not covered by a lens. Big Ass Fans recommends cleaning the LED board monthly with compressed air. Do not touch the LEDs with bare hands. EPR 45: 97457-KY-1



USA BIGASSFANS.COM 877-244-3267

CANADA 844-924-4277 AUSTRALIA BIGASSFANS.COM/AU 1300 244 277

SINGAPORE 65 6709 8500

MALAYSIA 603 5565 0888